

ADA-COMPLIANT HORIZONTALLY INTEGRATED SAFE & HYGIENIC



Shown above: 0487-R; below: 0487-L




FEATURES:

- **Self-closing disposal door**
- **Removable waste container with safety-edged finger hole—convenient and safe for service**
- **Vandal resistant toilet tissue rollers**

DURABILITY:

- **Service door attached with full-length 3/16" multi-staked piano hinge**
- **Panels and Doors: 18 gauge type 304 stainless steel**
- **Face frame and cabinet; 22 gauge type 304 stainless steel**

This recessed seat cover and toilet paper dispenser with sanitary napkin disposal for toilet compartments is specially manufactured by ASI to meet new Building Code requirements for ADA accessibility when mounted properly. Sleek and durable type 304 stainless steel, and double toilet tissue dispensers with vandal resistant rollers makes this accessory ideal for all building types and traffic environments.

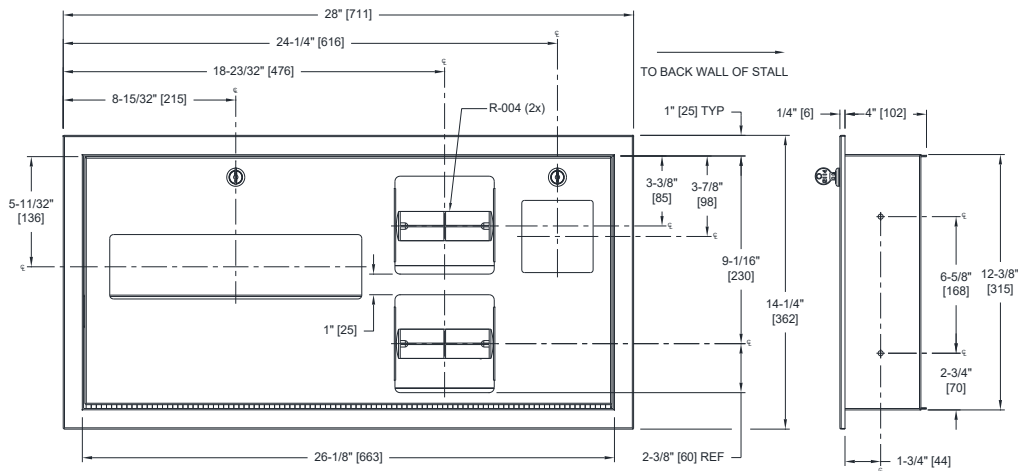

CAPACITY:

- Holds and dispenses 1000 paper seat covers
- Holds and dispenses two standard toilet paper rolls
- Removable waste container shall have a capacity of 0.45 gal (1.7 L)

SPECIFICATIONS

Recessed Seat Cover and Toilet Paper Dispenser with Sanitary Napkin Disposal shall hold and dispense 1000 paper seatcovers and two standard toilet paper rolls. Removable waste container shall have a capacity of 0.45 gal (1.7 L). Seat cover dispenser panel and toilet paper dispenser door shall be 18 gauge type 304 stainless steel alloy 18-8. Face frame and cabinet shall be 22 gauge. All exposed surfaces shall have satin finish and be protected by PVC film easily removed after installation. Seat cover cutout shall have a fully deburred edge for snag-free dispensing and user safety. Disposal door shall be hung on spring-tensioned hinges and shall have international graphic waste disposal symbol. Service door shall be attached to cabinet at bottom with a full-length 3/16" Dia [Ø5] stainless steel multi-staked piano hinge and shall be held closed with a tumbler lock keyed alike to other ASI washroom equipment. Face trim shall be 1" [25] wide formed from one piece with no mitres, welding or open seams and have 1/4" [6] square return to face of wall. Structural assembly of all components shall be of welded construction. Cabinet shall include theft and vandal resistant rollers that shall be of molded high-impact resistant plastic with integral molded-in stainless steel endpins and two (2) rollers [p/n R-004] shall be supplied.

ROUGH WALL OPENING (RWO): 26-1/2" W x 12-7/8" H x 4-1/4" D (673 x 327 x 108 mm)